




Rev.2

### Self-driven Piezo Transducer

## TFM-02D




#### FEATURES:

- Low Frequency
- Low Current Drain
- Light and compact


#### APPLICATIONS:

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

#### DIMENSIONS: (Unit: mm)

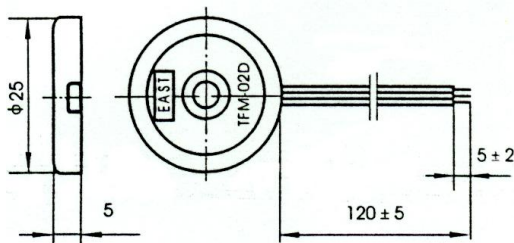

#### CHARACTERISTICS:

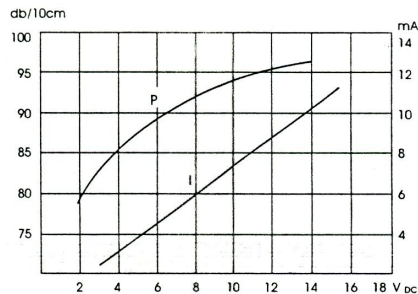

#### ELECTRICAL SPECIFICATIONS:

Min. Sound Pressure Level at

6V<sub>DC</sub>/10cm.....85dB(A)

Rated Voltage.....6V<sub>DC</sub>

Allowable Input Voltage.....3~16V<sub>DC</sub>

Max. Consumption.....5mA/6V<sub>DC</sub>

Oscillating Frequency.....5.0±1.0 kHz


Operating Temperature.....-20~+70°C

Case Material/Color.....ABS/Black

Weight.....2g

Wire Standard.....UL1571-30AWG

#### TEST CIRCUIT:



#### PACKING INFORMATION:

Packing: 7500 pcs per export carton

Carton Size: 47x30.5x21 cm

G. Weight: 16.5 kgs N. Weight: 15.0 kgs

Address: Multitrack GmbH, Pfaffenrain 22, 35606 Solms, Germany

Tel: +49-6442-9220950, Fax: +49-3212-1258768

