

Data Sheet

LL01CR-YJxxL02-Mx



Xlamp XM-L AWT



Features& Typical Applications

- High efficiency
- Available in 4 beam Patterns
- Optimized for uniform effects
- Lens with Housing
- Decorative Light
- Architectural Lighting
- Down Light

Table of Contents

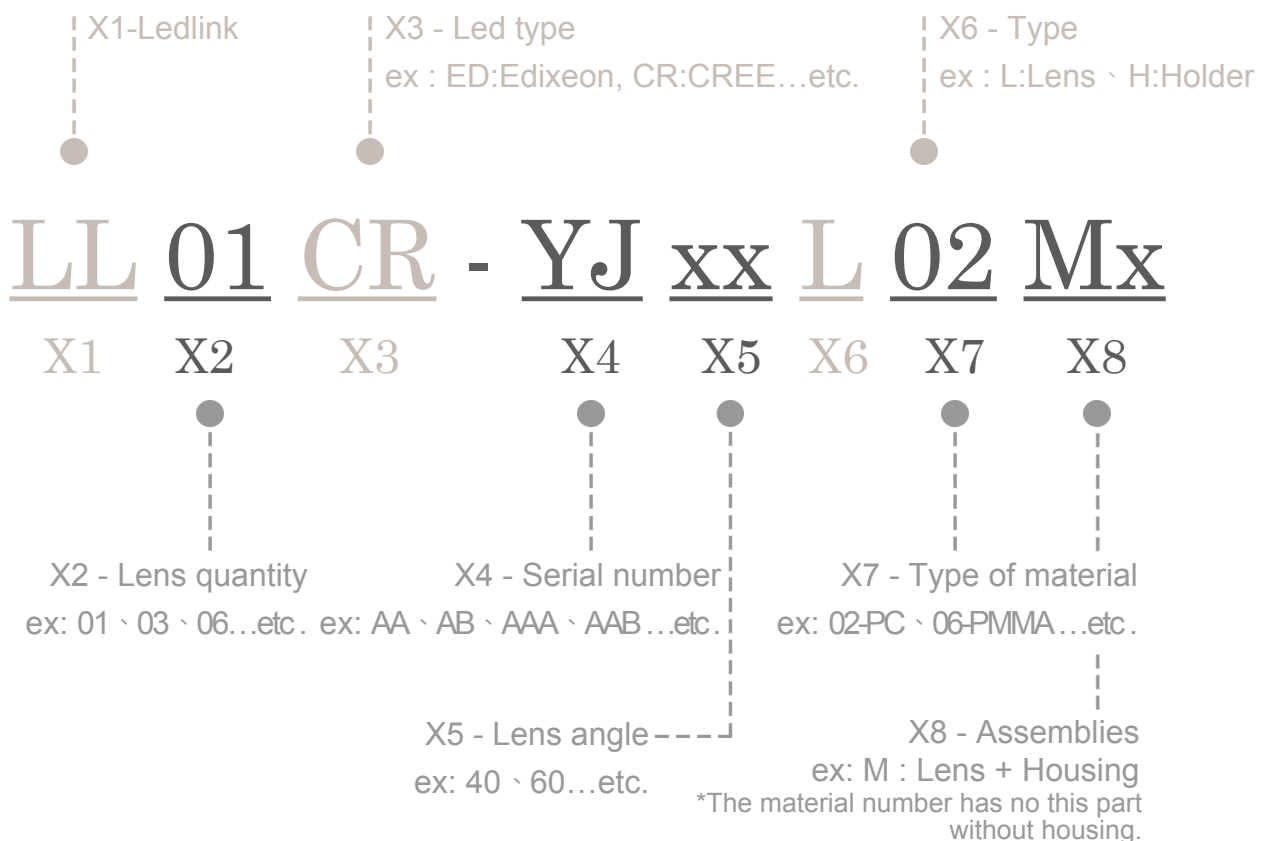
General Information & Product Nomenclature.....	P.2
Optical Specifications	P.3
Mechanical Specifications	P.4
Package Specifications	P.5

LL01CR-YJxxL02-Mx

General Information

- Lens Material Optical Grade PC
- Operating Temperature range -40°C~+110°C(upper limit +120°C)
- Storage Temperature range -40°C~+110°C(upper limit +120°C)
 - * Average transmittance in visible spectrum 400nm~700nm>90%
- Usage and Maintenance:
 1. If necessary, clean lenses with mild soap, water and soft cloth.
 2. Never use any commercial cleaning solvents on lenses, like alcohol.
 3. Please handle or install lenses with wearing gloves, skin oils may damage lens or its optical characteristic.

Product Nomenclature















LL01CR-YJxxL02-Mx

Optical Specifications



Xlamp XM-L AWT 

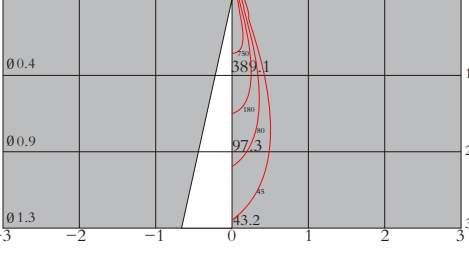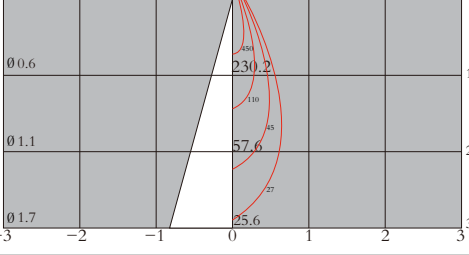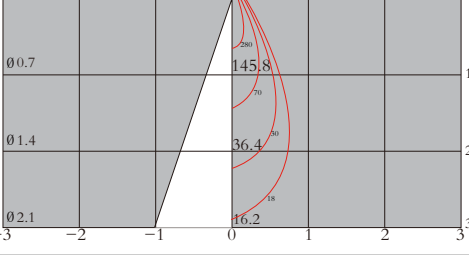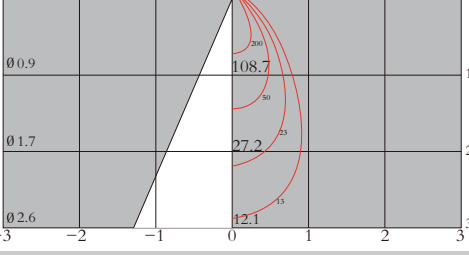Note: (1) degree: tolerance $\pm 2^\circ$
(2) optical value: tolerance $\pm 10\%$

Part Number	FWHM	Field Angle*	cd / lm	IES File
LL01CR-YJ40L02-Mx	22°	42°	4.7	Download
				
Beam Pattern	Light Distribution Curve	Illuminance Distribution		
Part Number	FWHM	Field Angle*	cd / lm	IES File
LL01CR-YJ60L02-Mx	34°	62°	2.4	Download
				
Beam Pattern	Light Distribution Curve	Illuminance Distribution		
Part Number	FWHM	Field Angle*	cd / lm	IES File
LL01CR-YJ80L02-Mx	41°	83°	1.5	Download
				
Beam Pattern	Light Distribution Curve	Illuminance Distribution		
Part Number	FWHM	Field Angle*	cd / lm	IES File
LL01CR-YJ100L02-Mx	56°	101°	1.0	Download
				
Beam Pattern	Light Distribution Curve	Illuminance Distribution		

*The Field Angle is the angle between the two directions opposed to each other over the beam axis for which the luminous intensity is 10% that of the maximum luminous intensity.
*This testing result is obtained through testing the popular rank LED samples which provided by the original manufacturer. Hence, the testing results would be varied as the users choose same LED model but different rank.

LL01CR-YJxxL02-Mxx

Mechanical Specification

1. Fixing method

Note: All dimensions are in mm.

☐ Glue

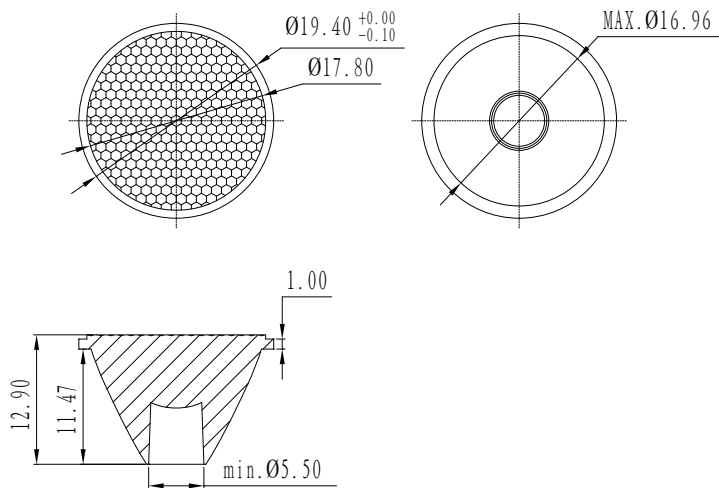
☐ Screw

☒ Tape


☒ Fixing-ring

☒ Frame


2. Lens dimensions



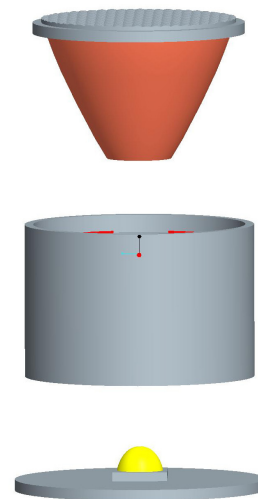
3. Lens + Leds+MCPCB assembly instruction



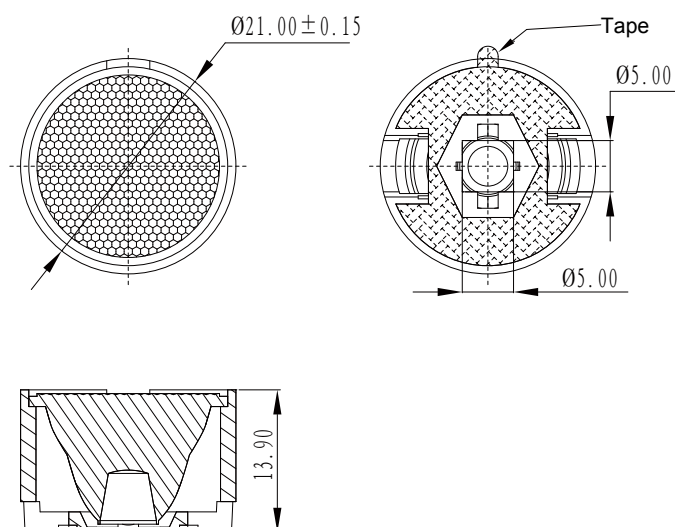4. Lens assembly dimensions



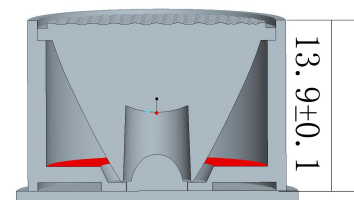
5. View assembly lens with MCPCB:





LL01CR-YJxxL02-Mx

Package Specifications

Item	Quantity	Total	Size(L*W*H)	G.W
Inner box		100 pcs	27*27*1.8 cm	2.1g
Outer box	1000pcs/Outer box	1000 pcs	29*29*22 cm	
Outer box				



100pcs/Inner box

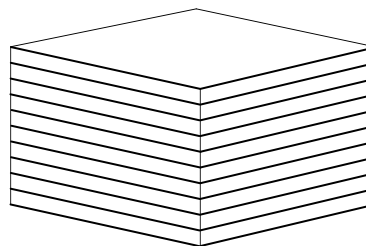

1000pcs/Outer box



Note: